

# SB-2 200 (240200243)

## GENERAL DATA



### CENTRIFUGAL LOW PROFILE BOX. EXTERNAL ROTOR MOTOR

#### CONSTRUCTIVE FEATURES:


- Box manufactured in galvanized sheet with thermo-acoustic insulation, Bs1d0 fire class
- Rectangular connection flanges
- Asynchronous external rotor, which includes thermal protector and ball bearings permanently greased. IP-44 protection and insulation class B according to DIN 40.050 h1. Standard voltage 230V 50Hz

#### APPLICATIONS:

Designed for inline installation, they are suitable for:

- Air renewal in bathrooms and small premises.
- Perfect for installing in false ceilings or open.
- Maximum working temperature: 50°C.

## PERFORMANCE CURVE

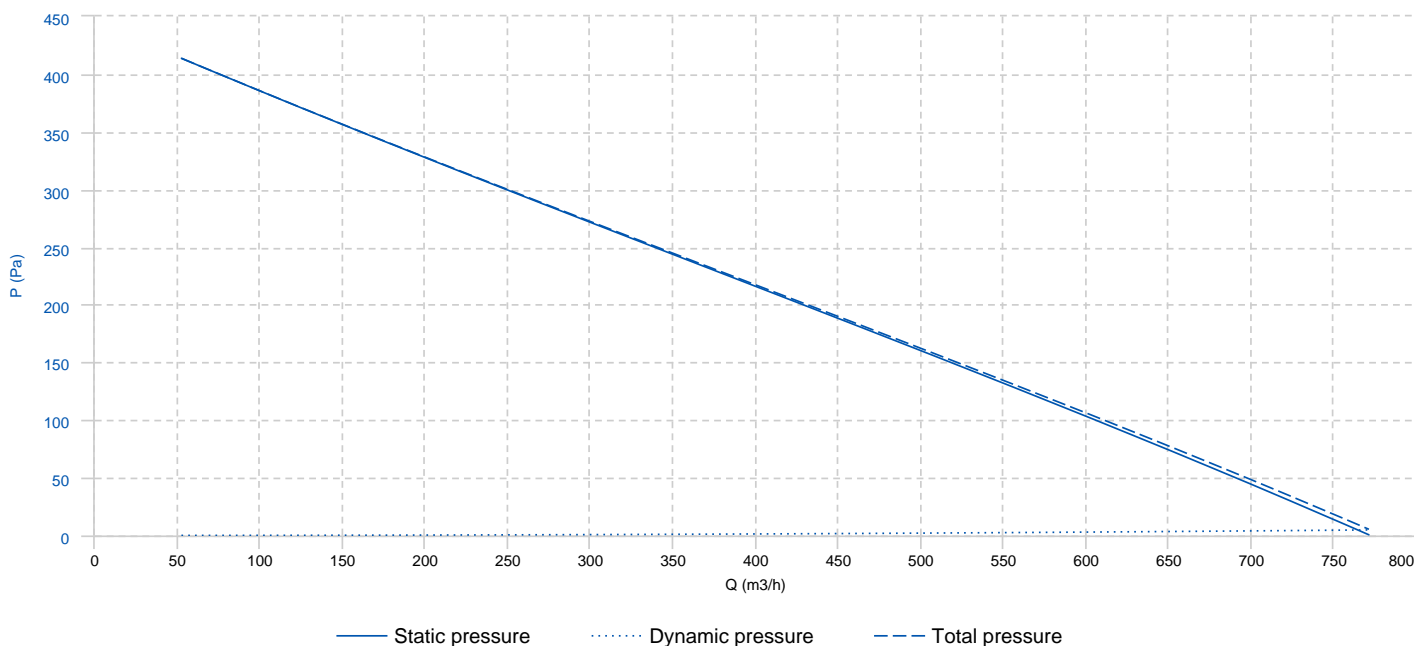


## TECHNICAL DATA

Fan

RPM	2480	Approx. weight	13.5 kg	Max. Flow	770 m³/h
-----	------	----------------	---------	-----------	----------


## DIMENSIONS

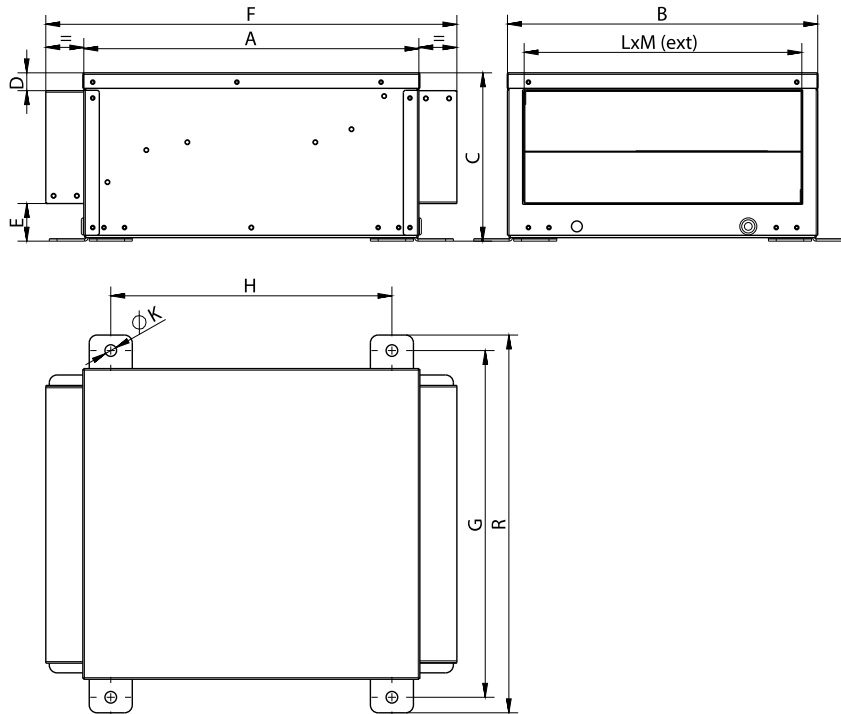

Dimensions (mm)

A	501	B	453	C	255,5	H	431,5	D	23
E	48,5	F(aprox)	609	G	500	ØK	15	L (ext)	412
M (ext)	184	R	540						

## WIRING DIAGRAM

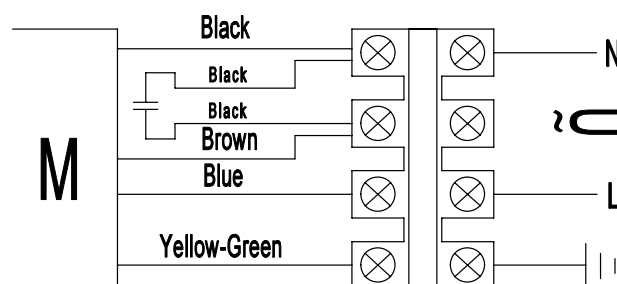

## ACCESSORIES



**SINGLE PHASE MANUAL SPEED CONTROLLER**  
REG 1.5A  
REF: 960710015



**SAFETY SWITCH**  
INT 6,5 1V  
REF: FX452508



**SPEED CONTROLLER  
REGD-1  
REF: 300782600**



**SINGLE PHASE VOLTAGE REGULATOR WITH 0-10v  
ENTRANCE  
REG VMC 3A  
REF: 300953903**

**SPARE PARTS**

	Code	Family	Model	RPM	Degrees
0	240203018SP04	1 x CAPACITOR	3µF 450V	-	-