

SB-2 250 (240250243)

GENERAL DATA



CENTRIFUGAL LOW PROFILE BOX. EXTERNAL ROTOR MOTOR

CONSTRUCTIVE FEATURES:


- Box manufactured in galvanized sheet with thermo-acoustic insulation, Bs1d0 fire class
- Rectangular connection flanges
- Asynchronous external rotor, which includes thermal protector and ball bearings permanently greased. IP-44 protection and insulation class B according to DIN 40.050 h1. Standard voltage 230V 50Hz

APPLICATIONS:

Designed for inline installation, they are suitable for:

- Air renewal in bathrooms and small premises.
- Perfect for installing in false ceilings or open.
- Maximum working temperature: 50°C.

PERFORMANCE CURVE

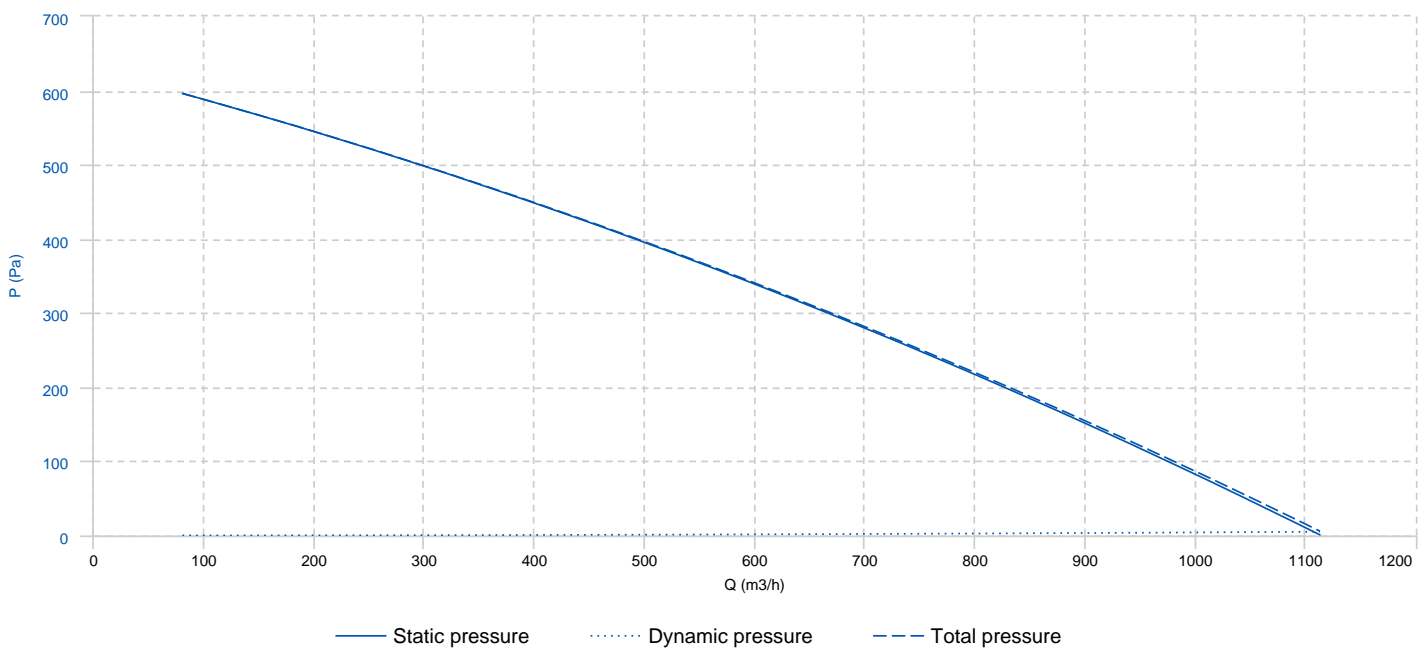


TECHNICAL DATA

Fan

RPM	2530	Approx. weight	17.5 kg	Max. Flow	1120 m³/h
-----	------	----------------	---------	-----------	-----------


DIMENSIONS

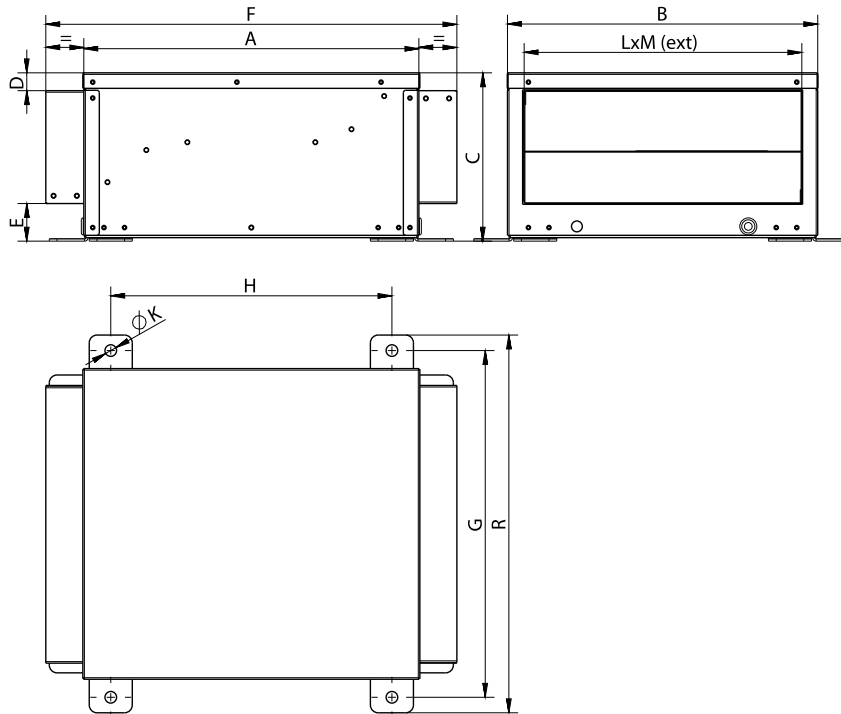

Dimensions (mm)

A	567	B	497	C	305,5	H	467,5	D	23
E	48,5	F(aprox)	685	G	554	ØK	15	L (ext)	456
M (ext)	234	R	604						

WIRING DIAGRAM

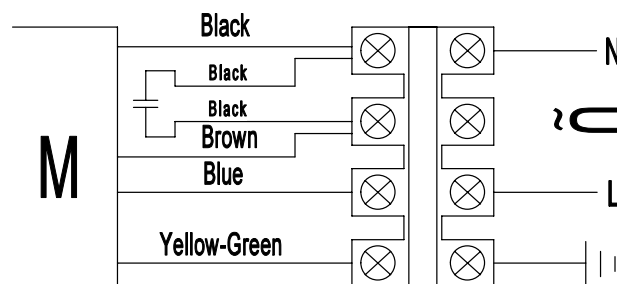

ACCESSORIES



SINGLE PHASE MANUAL SPEED CONTROLLER
REG 1.5A
REF: 960710015



SAFETY SWITCH
INT 6,5 1V
REF: FX452508



**SPEED CONTROLLER
REGD-1
REF: 300782600**



**SINGLE PHASE VOLTAGE REGULATOR WITH 0-10v
ENTRANCE
REG VMC 3A
REF: 300953903**

SPARE PARTS

	Code	Family	Model	RPM	Degrees
0	240253018SP04	1 x CAPACITOR	6µF 450V	-	-