

SB-2 280 (240280243)

GENERAL DATA



CENTRIFUGAL LOW PROFILE BOX. EXTERNAL ROTOR MOTOR

CONSTRUCTIVE FEATURES:


- Box manufactured in galvanized sheet with thermo-acoustic insulation, Bs1d0 fire class
- Rectangular connection flanges
- Asynchronous external rotor, which includes thermal protector and ball bearings permanently greased. IP-44 protection and insulation class B according to DIN 40.050 h1. Standard voltage 230V 50Hz

APPLICATIONS:

Designed for inline installation, they are suitable for:

- Air renewal in bathrooms and small premises.
- Perfect for installing in false ceilings or open.
- Maximum working temperature: 50°C.

PERFORMANCE CURVE

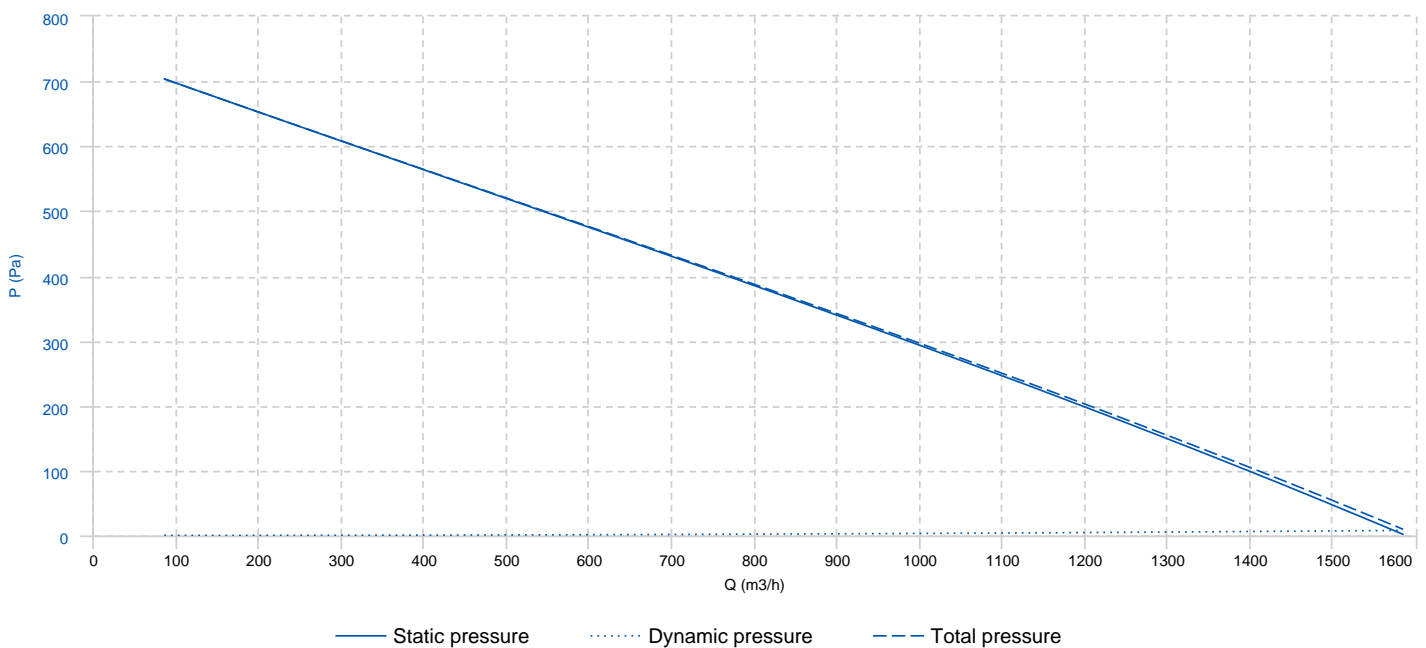


TECHNICAL DATA

Fan

RPM	2480	Approx. weight	23.5 kg	Max. Flow	1580 m ³ /h
-----	------	----------------	---------	-----------	------------------------


DIMENSIONS

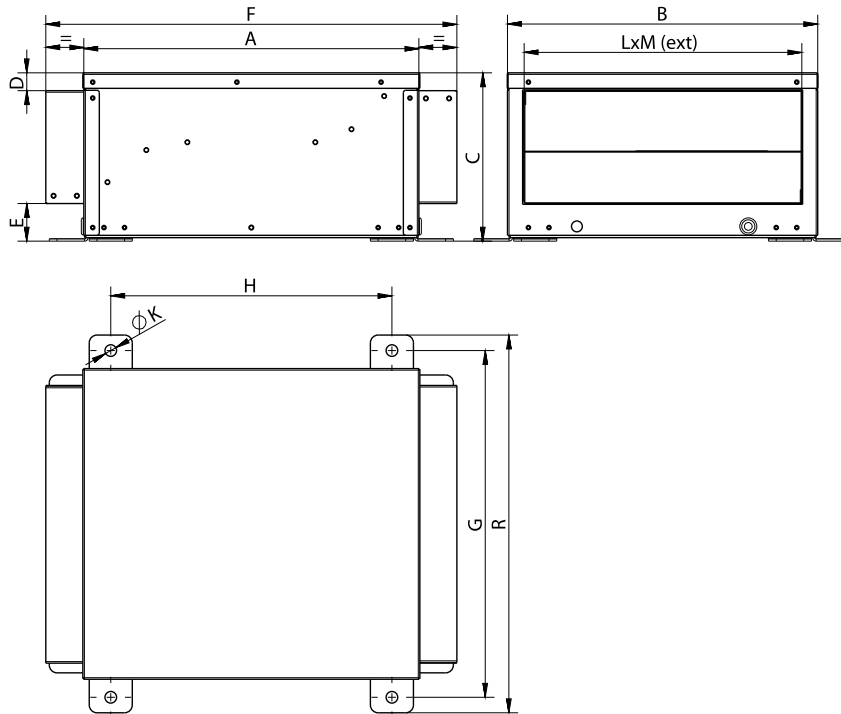

Dimensions (mm)

A	637	B	552	C	340,5	H	437,5	D	23
E	48,5	F(aprox)	755	G	609	ØK	15	L (ext)	511
M (ext)	269	R	659						

WIRING DIAGRAM

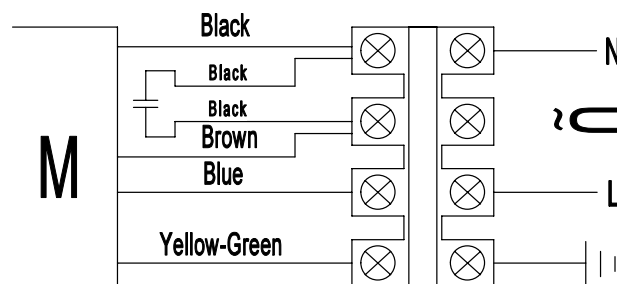

ACCESSORIES



SINGLE PHASE MANUAL SPEED CONTROLLER
REG 1.5A
REF: 960710015



SAFETY SWITCH
INT 6,5 1V
REF: FX452508



**SINGLE PHASE VOLTAGE REGULATOR WITH 0-10v
ENTRANCE
REG VMC 3A
REF: 300953903**

SPARE PARTS

	Code	Family	Model	RPM	Degrees
0	240283018SP04	1 x CAPACITOR	8 μ F 450V	-	-