

# SB-2 355 (240350243)

## GENERAL DATA



### CENTRIFUGAL LOW PROFILE BOX. EXTERNAL ROTOR MOTOR

#### CONSTRUCTIVE FEATURES:


- Box manufactured in galvanized sheet with thermo-acoustic insulation, Bs1d0 fire class
- Rectangular connection flanges
- Asynchronous external rotor, which includes thermal protector and ball bearings permanently greased. IP-44 protection and insulation class B according to DIN 40.050 h1. Standard voltage 230V 50Hz

#### APPLICATIONS:

Designed for inline installation, they are suitable for:

- Air renewal in bathrooms and small premises.
- Perfect for installing in false ceilings or open.
- Maximum working temperature: 50°C.

## PERFORMANCE CURVE

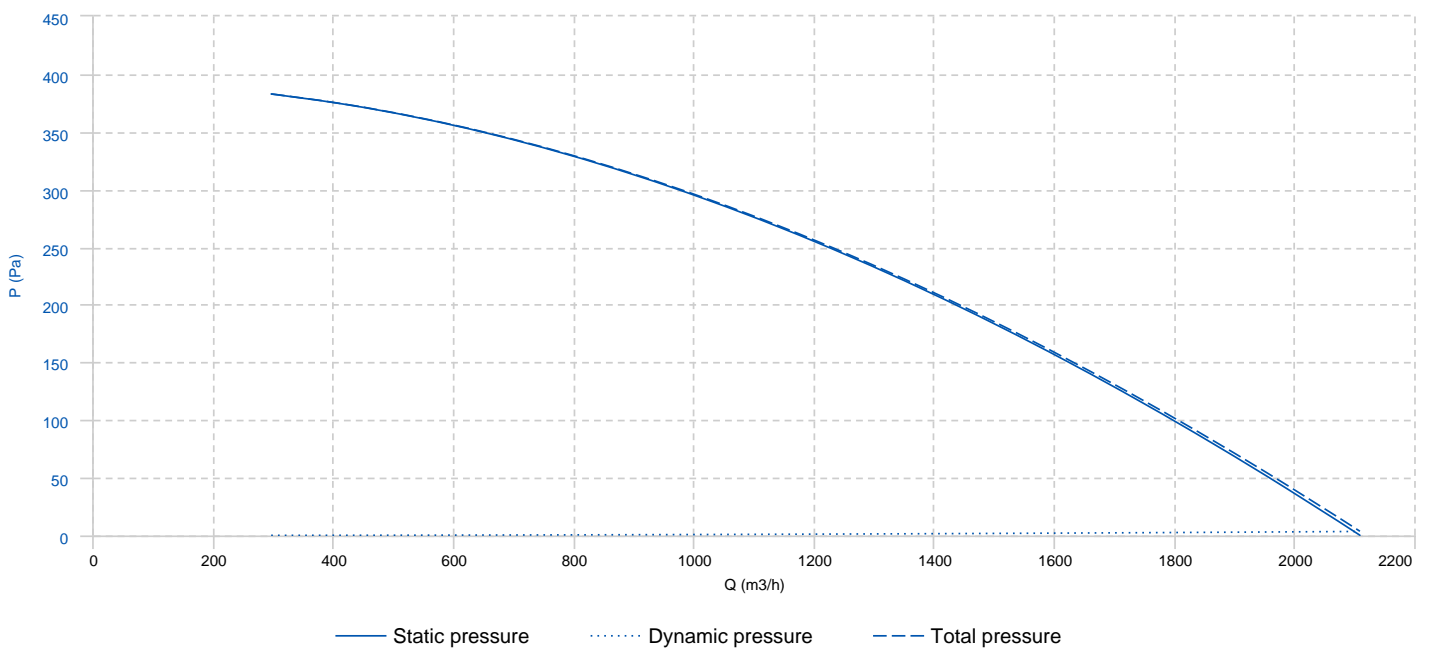


## TECHNICAL DATA

Fan

RPM	1400	Approx. weight	35 kg	Max. Flow	2120 m³/h
-----	------	----------------	-------	-----------	-----------


## DIMENSIONS

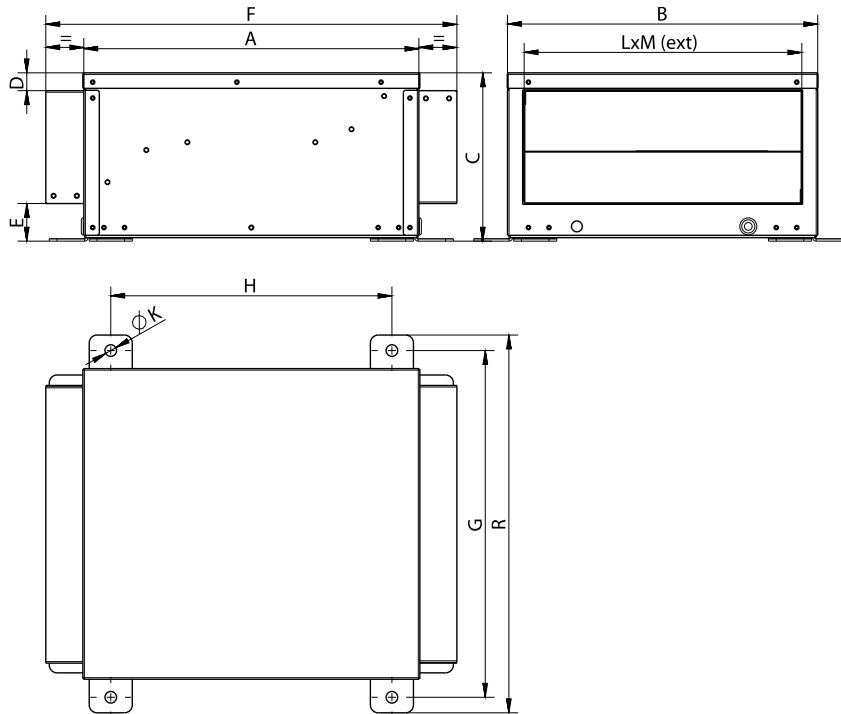

Dimensions (mm)

A	804	B	692	C	445,5	H	704,5	D	23
E	48,5	F(aprox)	962	G	749	ØK	15	L (ext)	651
M (ext)	374	R	799						

## WIRING DIAGRAM

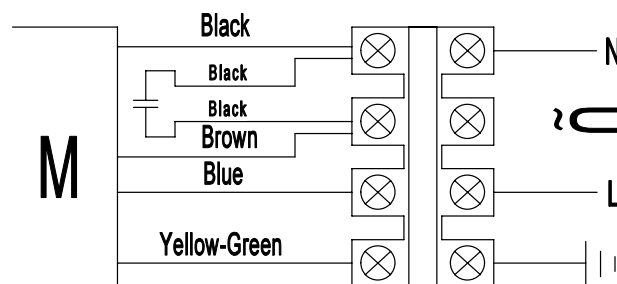

## ACCESSORIES



**SINGLE PHASE MANUAL SPEED CONTROLLER**  
REG 1.5A  
REF: 960710015



**SAFETY SWITCH**  
INT 6,5 1V  
REF: FX452508



**SPEED CONTROLLER  
REGD-1  
REF: 300782600**



**SINGLE PHASE VOLTAGE REGULATOR WITH 0-10v  
ENTRANCE  
REG VMC 3A  
REF: 300953903**

**SPARE PARTS**

	Code	Family	Model	RPM	Degrees
0	240253018SP04	1 x CAPACITOR	6 $\mu$ F 450V	-	-